



## VEGA APD

### For folding and stacking a great variety of towels.

The first and second length fold of the VEGA APD are executed by belt reverse folds. After the two lengthfolds, one crossfold is made combined with stacking.

With the above combination we can make one or two lengthfolds or French fold combined with one crossfold and stacking.

The Towel folder and stacker is available in different models. Special models are available to fold corners inside and/or corners outside.


Two or three stackers are available in the VEGA APD Selective 2 and VEGA APD Selective 3 so that the different towels can be sort automatically to two or three different stackers.

The standard VEGA APD has a return to operate conveyor. Special collecting conveyors can be offered on request.

There are models available that can fold towels with a length up to 2.400 mm.

A PLC-system and control panel display are self programmable to set for each towel the correct programme.



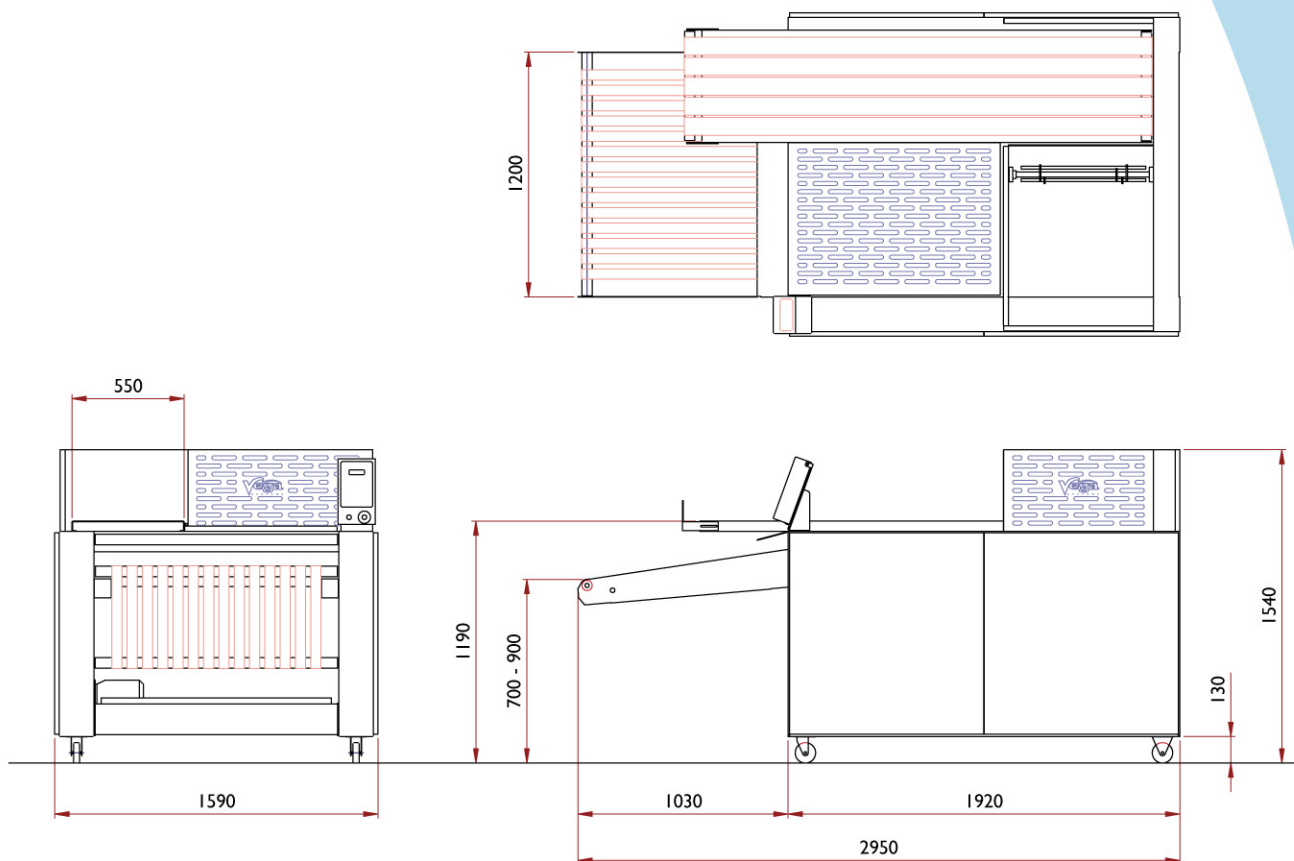

#### TOWEL SIZE:

Width	: 1.000 mm
Length standard	: 1.800 mm
Length before crossfolding	: 600 mm

#### TECHNICAL SPECIFICATIONS:

Electric connection	: 3 x 400V + 0 + E, 50 Hz.
Electric consumption	: 2,5 kWV, 16 Amp.
Pneumatic connection	: 1/2 ", 6 bar.
Pneumatic consumption	: 5 litres / piece

#### OPTIONAL:

- Stop conveyor before crossfolding.
- Towel length up to 2.400 mm.
- VEGA APD Selective 2 with two stackers.
- VEGA APD Selective 3 with three stackers.
- Collecting and discharge conveyor
- Roll-off conveyors for automatic strapping

#### INSTALLATION AND SERVICE:

Please contact VEGA-systems for more detailed lay-outs and technical data required for installation and service.



**VEGA-systems B.V.**  
 Dommelstraat 37  
 5347 JK Oss, The Netherlands  
 Phone +31(0)412 407090  
 Fax +31(0)412 407091  
 info@vegasystems.nl  
 www.vegasystems.nl