

VEGAROLL

High productive chest ironers.

Our range of VEGAROLL ironers are available in diameters 800 or 1.200mm and in widths up to 4.000mm. Steam, oil and gas heated versions are available.




The chest design with a highly polished bed gives excellent performance, 10-15% higher output than traditional deep chest design. The design features fixed chests with lifting rolls. In the raised position the rolls are locked.

Each individual roll is provided with Springpress, polyester padding and is exhausted by a separate suction fan that can be regulated individually. The intermediate gap pieces between the rolls are also heated.

The individual rolls are driven by a single, efficient AC inverter using standard V-belts. Each roll has a reliable heavy duty gearbox.

The feeding belts are driven by a separate inverter controlled motor. The electrical cabinet and the control panel are integrated into the side covers of the VEGAROLL. The VEGAROLL is CE marked and features front and rear emergency stops around the machine and a finger guard trip.

In combination with a VEGA FEEDER and VEGAFOLD a full high quality, high production finishing line can be delivered.

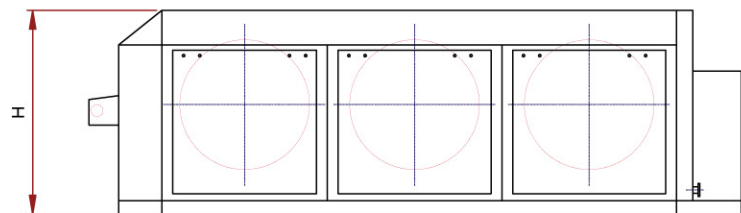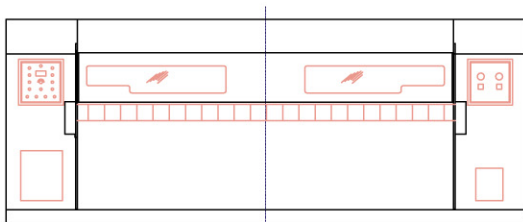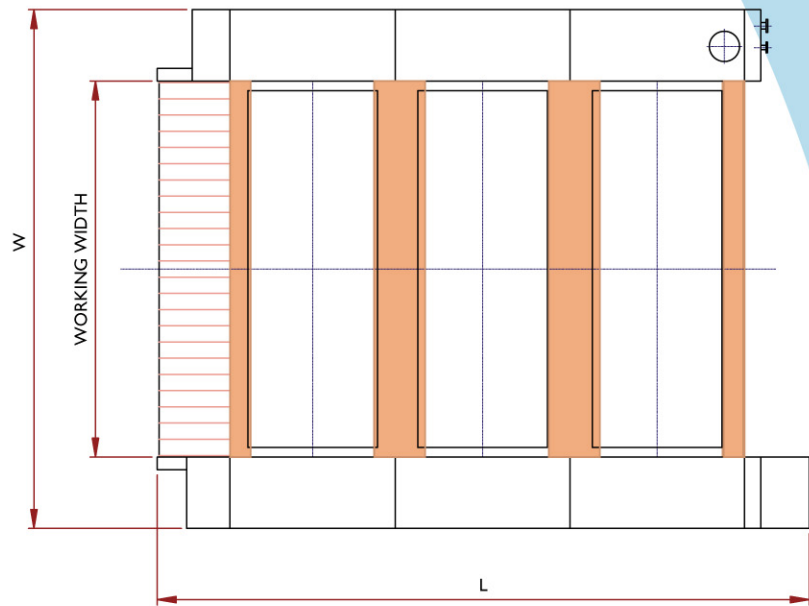

DIMENSIONS:

Overall height for 800mm roll : 1.650mm.
 Overall width for 800mm roll : Working width + 1.490mm
 Overall length for 800mm roll : 2.200mm + 1.220mm per roll

Overall height for 1.200mm roll : 1.850mm.
 Overall width for 1.200mm roll : Working width + 1.490mm
 Overall length for 1.200mm roll : 2.600mm + 1.620mm per roll

TECHNICAL SPECIFICATIONS:

Working width : 1.500 up to 4.000mm.
 Roll diameters : 800 and 1.200mm.
 Number of rolls : 1, 2, 3 or 4.
 Electrical source : 3 x 400V + 0 + E, 50 Hz.
 Electrical connection : on request.
 Steam connection : on request.

OPTIONAL:

Oil and gas heating version.
 Special working width.
 Microprocessor control.
 Nomex padding.

INSTALLATION AND SERVICE:

Please contact VEGA-systems for more detailed lay-outs and technical data required for installation and service.



VEGA-systems B.V.
 Dommelstraat 37
 5347 JK Oss, The Netherlands
 Phone +31(0)412 407090
 Fax +31(0)412 407091
 info@vegasystems.nl
 www.vegasystems.nl