



VEGA TROLLEY WASHER

For disinfection of trolleys and trucks in laundries.

The VEGA trolley washers are available in four different models KS2, KS3, KS4 and KS5 for disinfection of 2, 3, 4 or 5 trolleys in one cycle.

The whole VEGA trolley washer is manufactured completely from stainless steel. All top, bottom and side panels are completely insulated.


The machines are built according to a modular unit system and with the compact design it requires minimum floor space.

After manual loading the VEGA trolley washers complete the whole disinfection cycle automatically including automatic unloading.

The VEGA trolley washers are free standing machines and work completely independent.

A PLC-system and control panel display are self-programmable to set adjustable timers for steam-injection and drying time for different programs.

Terminal disinfection by steam-injection is done by fixed positioned steam injection pipes. All supplies for steam, water, air and exhaust are on top of the VEGA trolley washer.

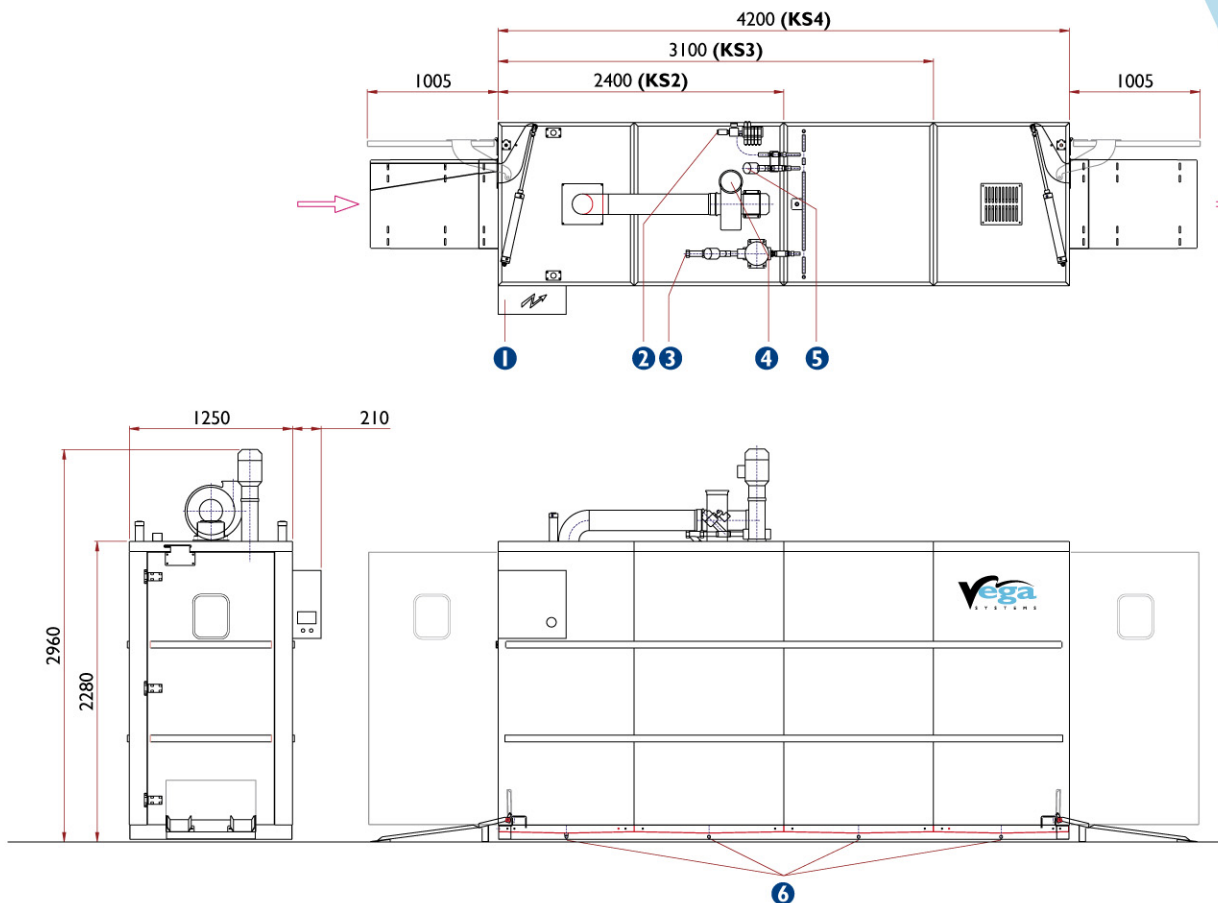

DIMENSIONS TROLLEY WASHER:

Width	: 1.250 mm
Height	: 2.280 mm
Length KS2	: 2.400 mm
Length KS3	: 3.100 mm
Length KS4	: 4.200 mm
Length KS5	: 5.300 mm

DIMENSIONS TROLLEYS:

Width	: 500 - 800 mm
Length	: 950 mm
Height	: 1.850 mm

TECHNICAL SPECIFICATIONS:

- ① Electrical source : 3 x 400V + 0 + E, 50 Hz.
Electrical consumption : 2,6 kW, 16 Amp.
- ② Pneumatic connection : 0,5", 6 bar
- ③ Water connection : 1"
Water consumption : 200 ltr/min.
- ④ Exhaust connection : 160 mm
- ⑤ Steam connection : 1", 6 bar
Steam consumption : 45 kg/hr.
- ⑥ Drain connection : 4 x 1,5"

OPTIONAL:

Water cleaning system by a high pressure waterpump.
 Temperature control system by PT100 inside the trolley washer.
 Extra guiding rails for special trolley dimensions.
 Continuous trolley washers with automatic transportation.

INSTALLATION AND SERVICE:

Please contact VEGA-systems for more detailed lay-outs and technical data required for installation and service.



VEGA-systems B.V.
 Dommelstraat 37
 5347 JK Oss, The Netherlands
 Phone +31(0)412 407090
 Fax +31(0)412 407091
 info@vegasystems.nl
 www.vegasystems.nl